



TEMPLATE OF A TYPICAL RECEIVER SRT ASSEMBLY

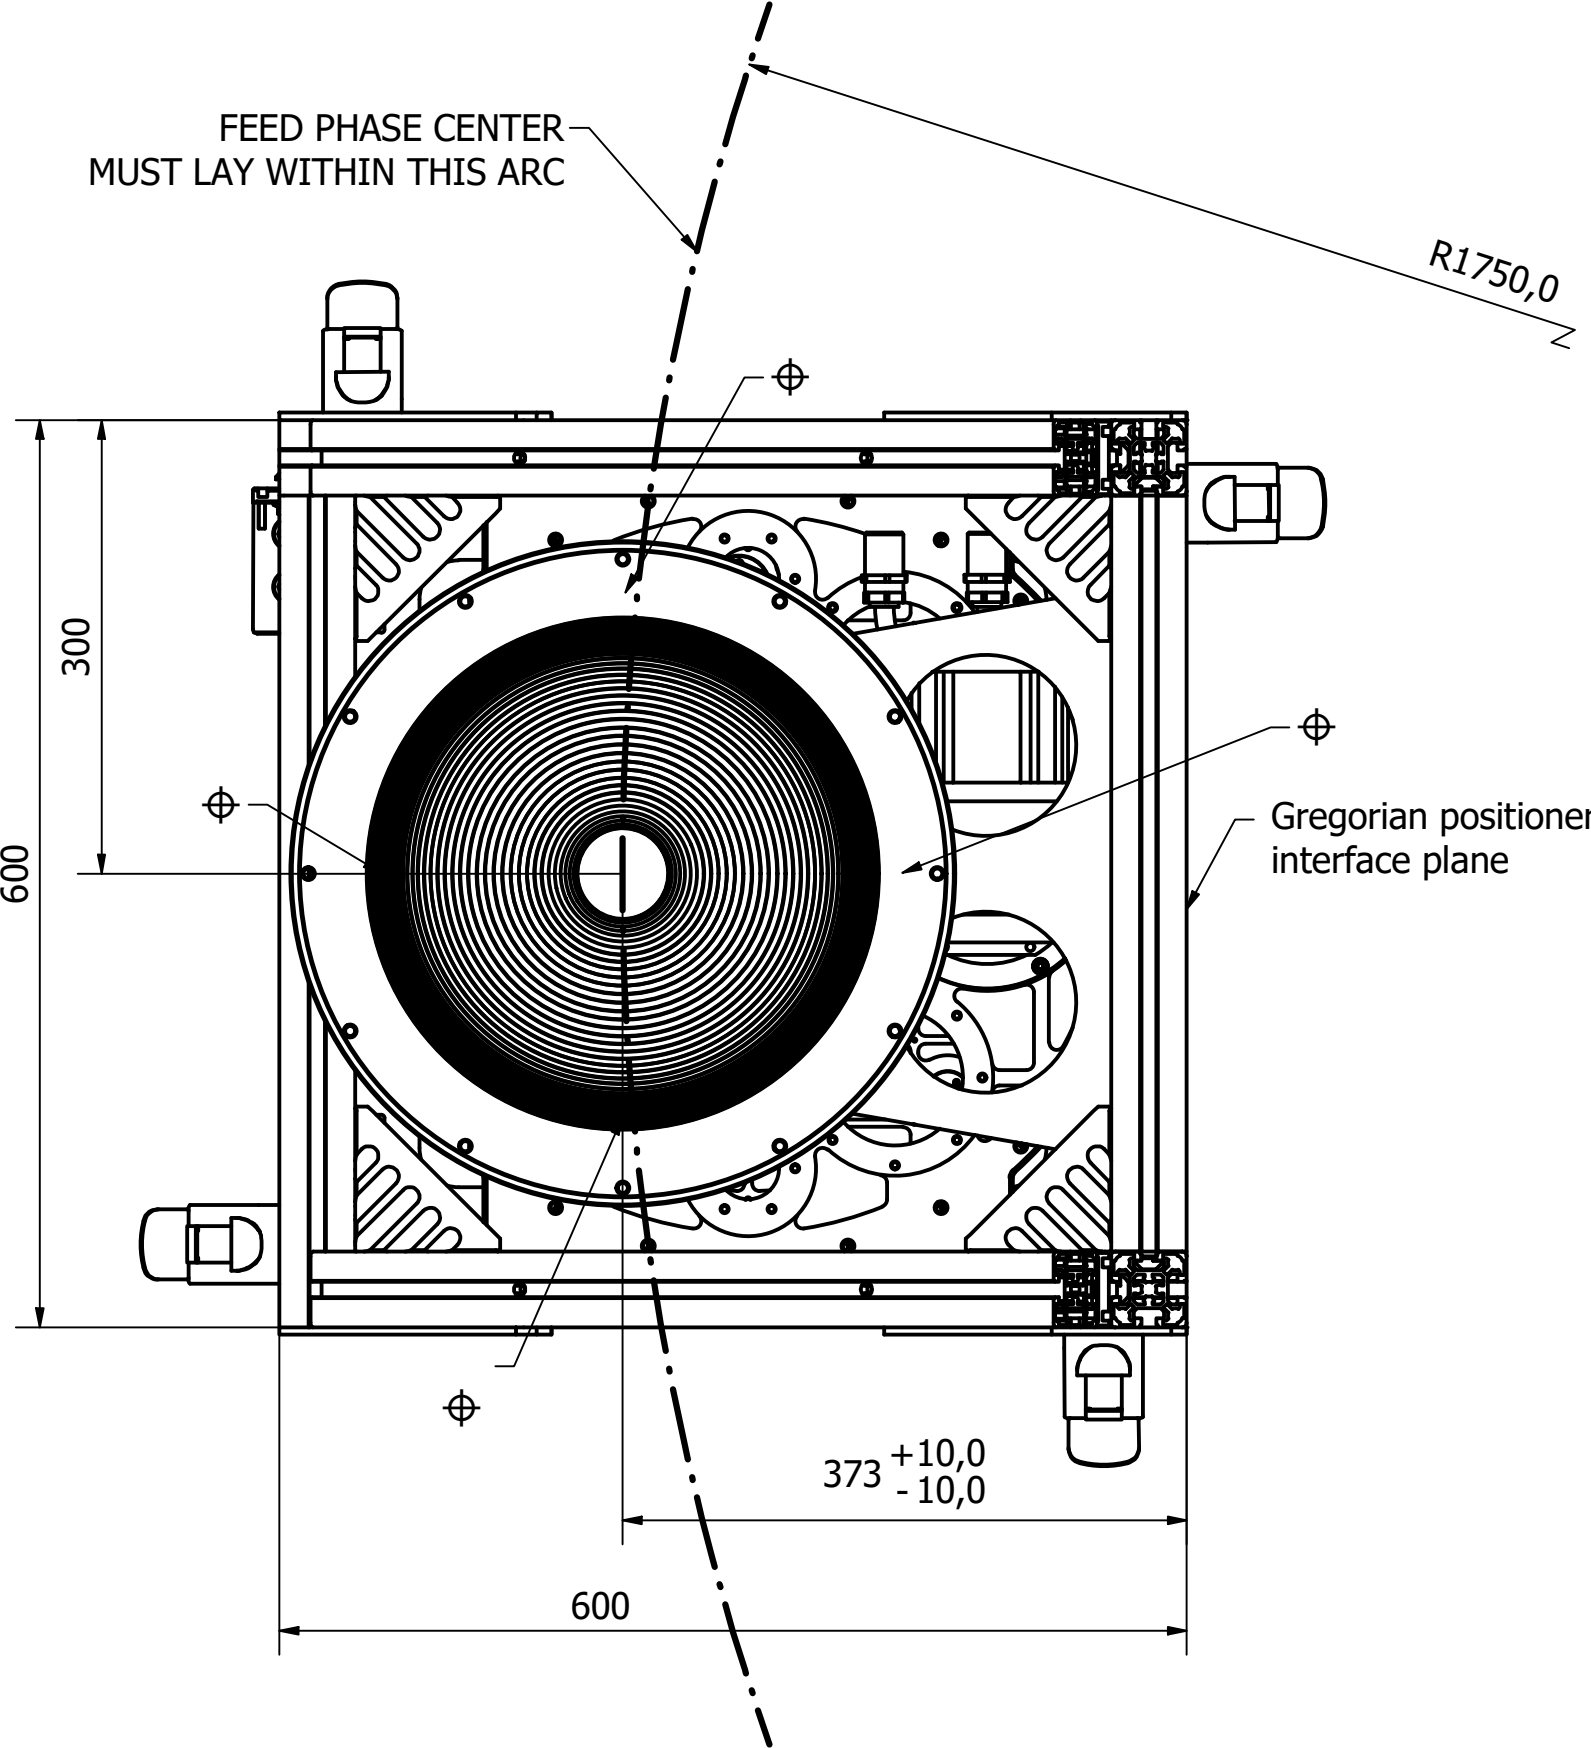

⊕ It is required to make at least 4 calibrated holes suitable to accommodate the Retroreflector supports for the LaserTracker 0.5 ", these holes must be have known coordinates.

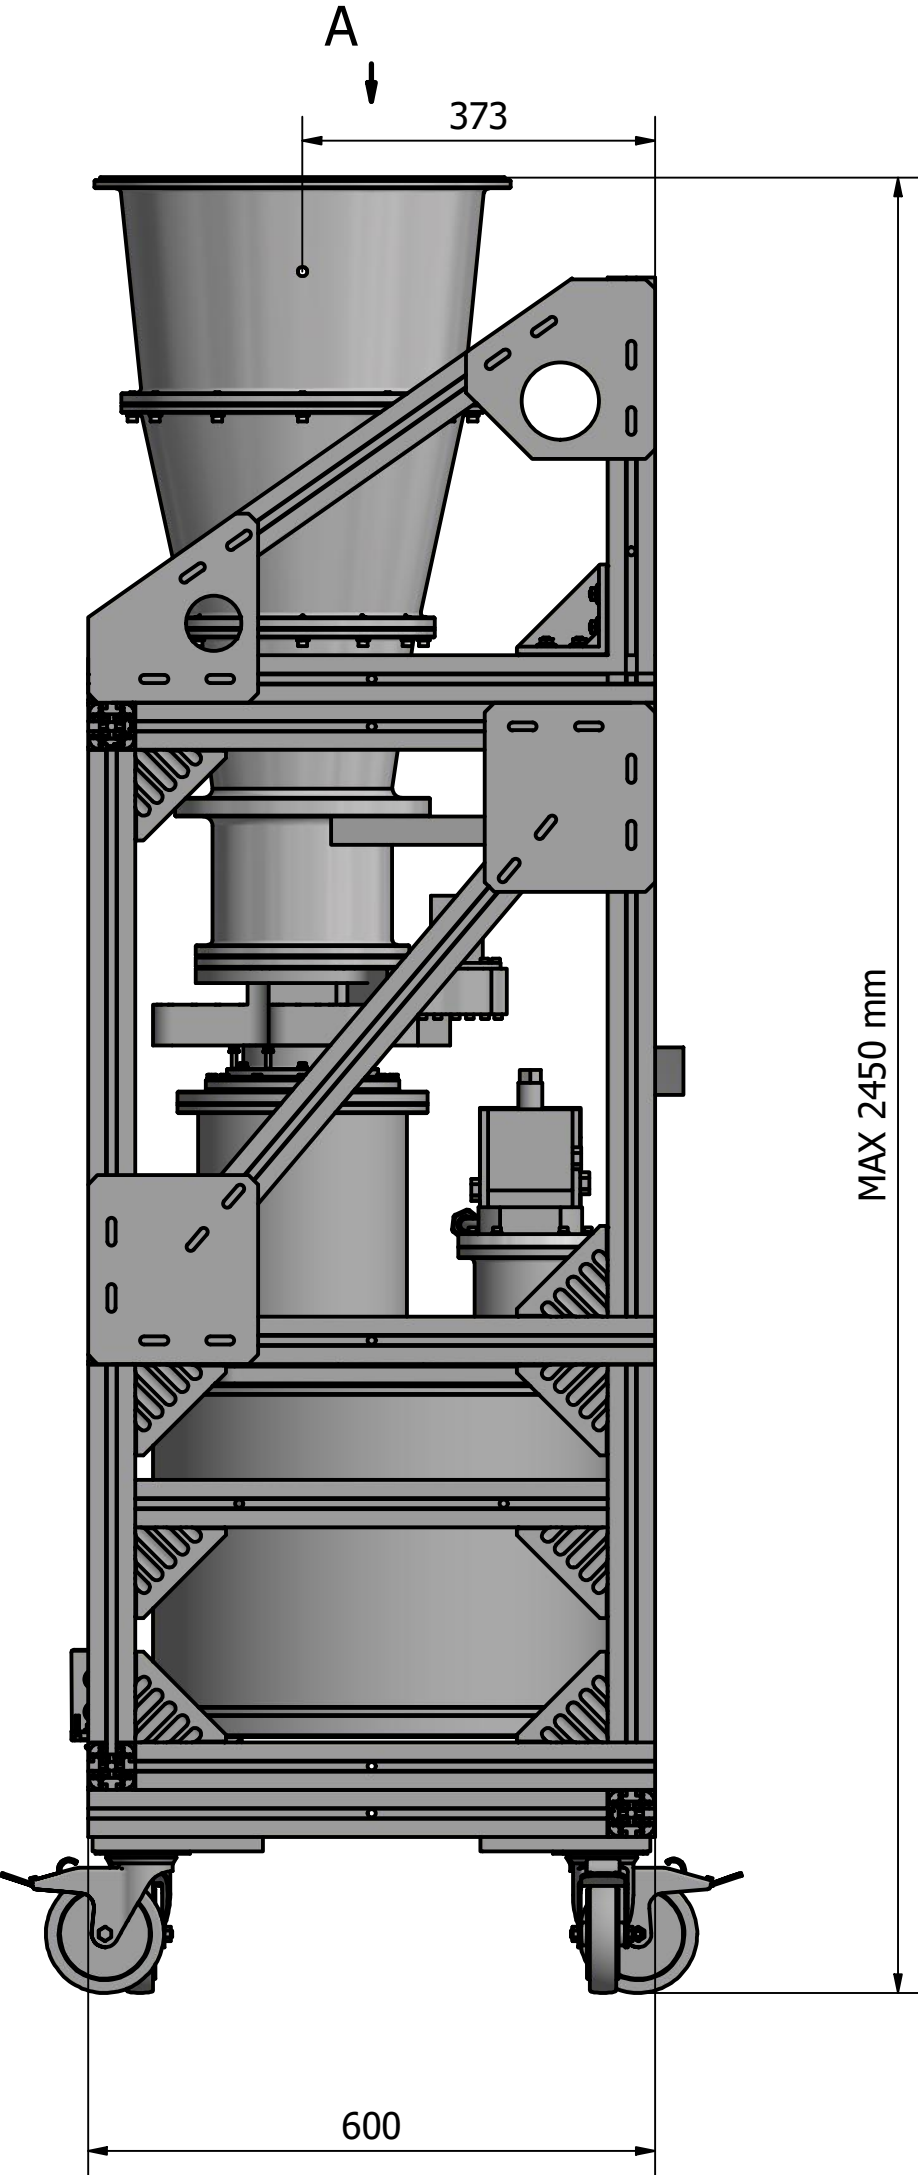